

# P.T. ANCHOR


Sill plate shear bolt anchor



“ELIMINATE ANCHORS STICKING UP ABOVE THE TOP OF SLAB, MAKING FOR A BETTER CONCRETE FINISH”

## Features

- Small, low Profile support base provides an easy to install connection point, which will not interfere with rebar or P.T. tendons.
- Base is quickly installed with 3 standard nails into the forms.
- Threaded rod provided cut to length per job to ensure finished anchor is flush with the top of the concrete deck.
- The Locator Cap is inserted into the top of the standard rod coupler, which is threaded onto the rod. After the concrete is cured, the Locator Cap is removed to expose the coupler.
- Anchorage is made to the coupler with a bolt or short piece of threaded rod.
- Available in 5/8" & 3/4". Other sizes pending

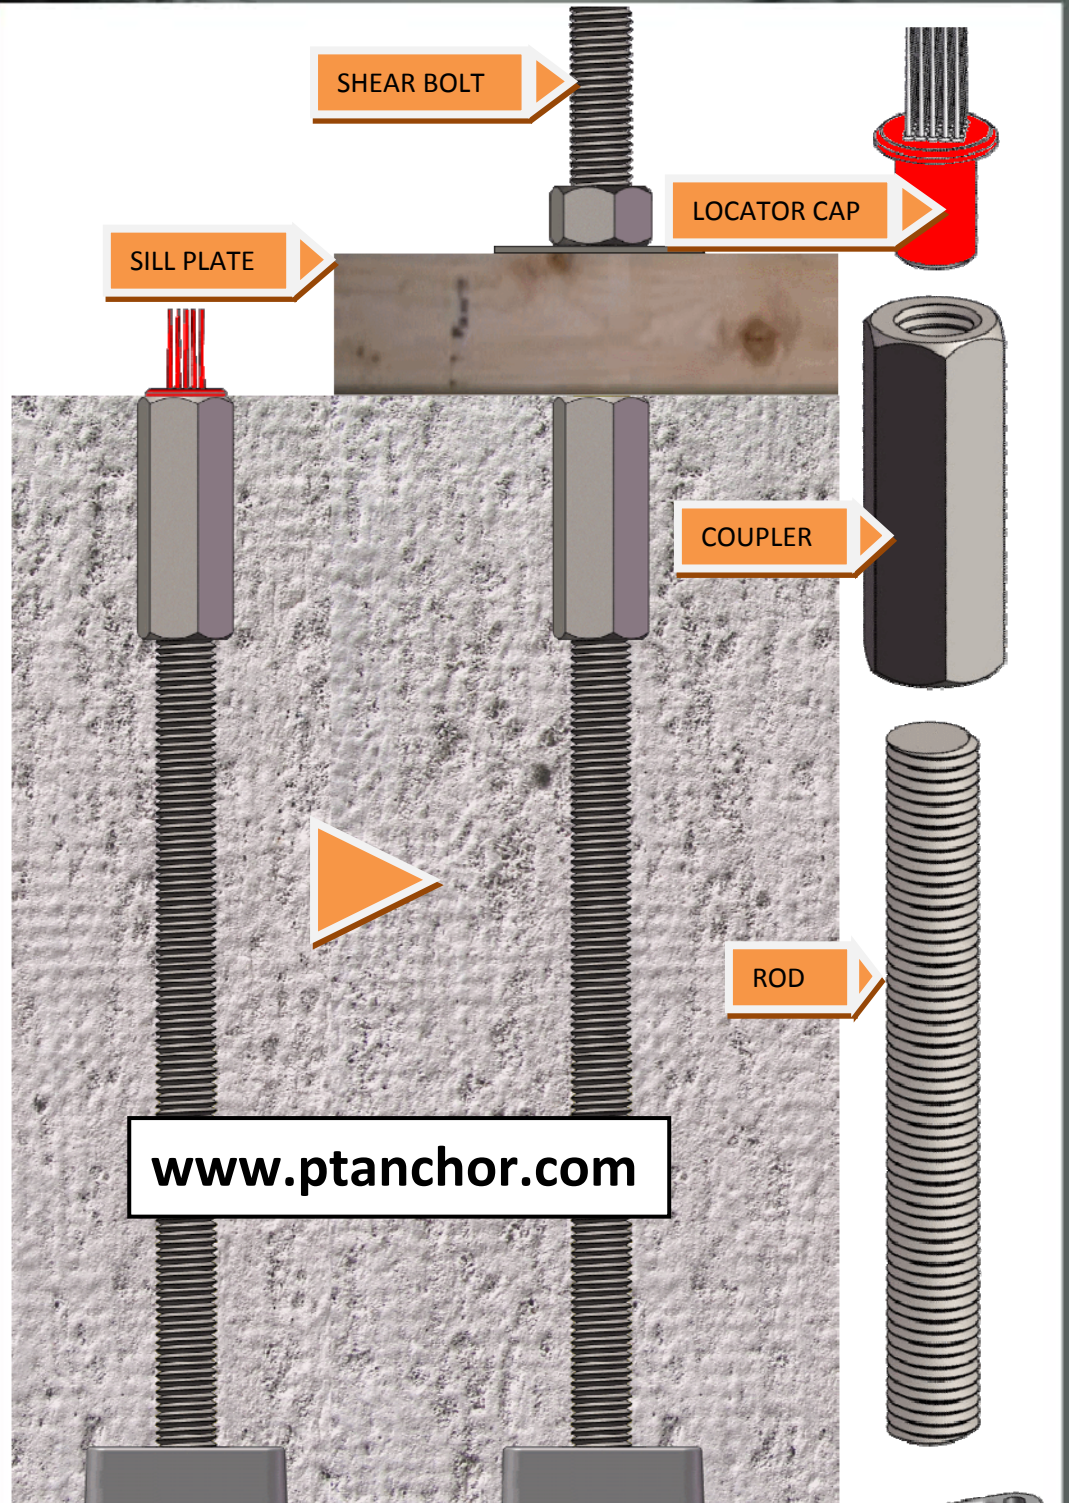

[www.ptanchor.com](http://www.ptanchor.com)

copyright 2010 chaining construction products.

PATENTS PENDING

ASSEMBLED ANCHOR FLUSH WITH TOP OF CONCRETE DECK

EMBED PLATE

